

PET FELT

I WAS[®]
A BOTTLE



NOW I'M FELT

PET FELT

RECYCLED POLYESTER FELT

Composition: 100%PL (60% R-PL - 40% PL)
Weight: 750 g/m² - 1200 g/m (±7%)
Thickness: 4 mm (±0,5 mm)
Rolls: 1,60 x 40 m

ITA

La sostenibilità è da sempre la filosofia aziendale di Manifattura Maiano. I prodotti certificati GRS garantiscono che per la loro realizzazione sono state impiegate materie prime provenienti da riciclo e il rispetto di criteri ambientali e sociali in tutta la filiera produttiva. Ogni passaggio è tracciato, dalla provenienza della materia prima alla sua trasformazione in feltro. Con la nostra tecnologia trasformiamo le fibre di poliestere proveniente dal riciclo del PET in un feltro agugliato. L'articolo Pet Felt 750gr è sempre disponibile a magazzino in tutti i colori della cartella.



 FINE POLYESTER FELT MADE FROM RECYCLED PLASTIC BOTTLES

ENG

Sustainability has always guided Manifattura Maiano. GRS certified products, guarantee that they are made from recycled raw materials in compliance with environmental and social criteria throughout the production chain. Each step is tracked, from the origin of the raw material to its transformation into felt. With our technology we transform polyesters fibers coming from recycled plastic bottle, into a needle-punched felt. Pet Felt 750gr is always available in stock in all the colors of the card.



60% GRS Recycled polyester
Certified by ICEA
ICEA-TX-997



STANDARD
100
1208054.O
CENTROCOT

OEKO-TEX® Standard 100
Global control and certification system for all textile-based products, which guarantees absence of substances harmful to humans and the Environment, through rigorous checks carried out every year. This product is certified in class 1, as safe in contact with skin, even of newborn.

Oeko-Tex Standard 100 guarantees compliance to:
REACH (EC Regulation 1907/2006), SVHC, POP (EC Regulation 1021/2019), GB18401, CPSC

MADE IN ITALY



PET FELT


READY COLORS
IN STOCK



966



898

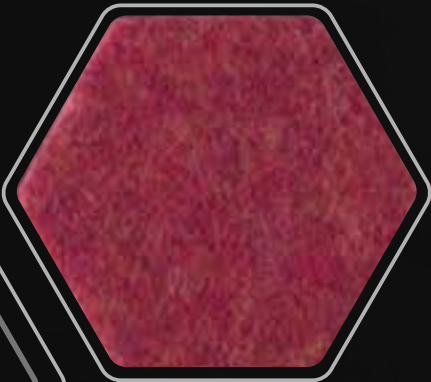

932



974



927



124




26



856



405

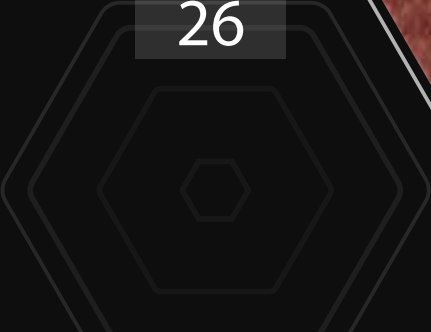




854



860

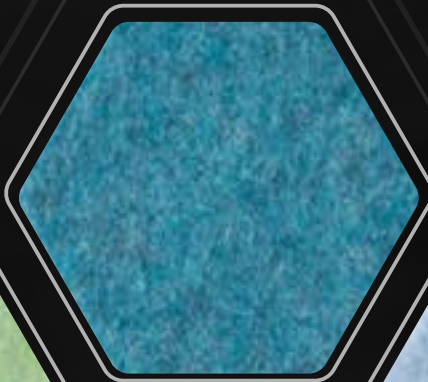

964



861




855




962



BREATHABLE

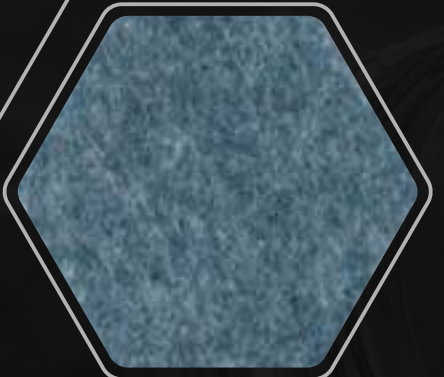


858

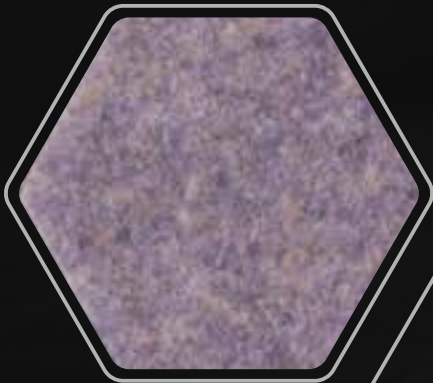

965




SUITABLE FOR
RAW CUT

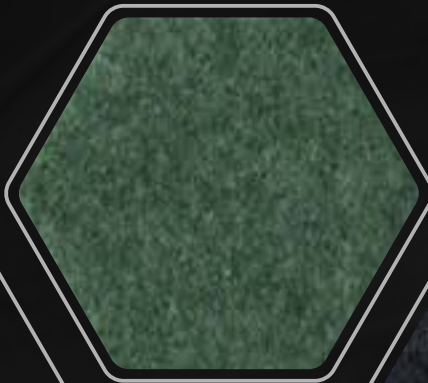

857



940

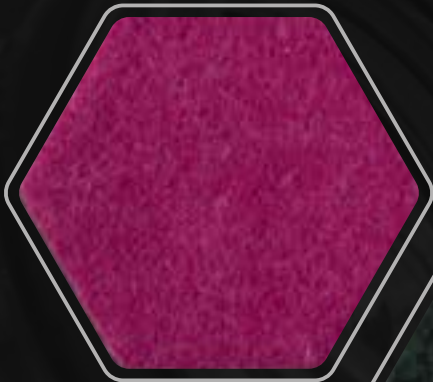

*426



64



RECYCLABLE

* Running Out Colors



TECHNICAL FEATURES

Tensile strength and elongation	ISO 9073-3	longit.: 1422 N, elong.: 81%
Tensile strength and elongation	ISO 9073-3	trasv.: 1334 N, elong.: 102%
Dim. Stability to washing and drying	ISO 5077, ISO 6330	Shrinkage < 2%
Abrasion resistance for uppers/lining	EN 13520	Abrasion at 25600 (dry): absent
Abrasion resistance for uppers/lining	EN 13520	Surface peel off (dry): moderate
Abrasion resistance for uppers/lining	EN 13520	Fading (dry): moderate
Abrasion resistance for uppers/lining	EN 13520	Abrasion at 25600 (wet): absent
Abrasion resistance for uppers/lining	EN 13520	Surface peel off (wet): moderate
Abrasion resistance for uppers/lining	EN 13520	Fading (wet): moderate

Please note that color may differ slightly from how they appear on this color chart