

VENEZIA/C

I WAS<sup>®</sup>  
A BOTTLE



NOW I'M FELT



MANIFATTURA  
MAIANO

# VENEZIA/C

## POLYESTER FELT

Composition: 100%PL

Weight: 620 g/m<sup>2</sup> - 1000 g/m (±7%)

Thickness: 4 mm ( $\pm 0,5$  mm)

Rolls: 1,60 x 40 m



ITA

Manifattura Maiano è da sempre molto sensibile alle tematiche ambientali.

Con la nostra tecnologia trasformiamo le fibre di poliestere rigenerato dal recupero di materiali in plastica (PET) in un feltro agugliato riciclato e riciclabile con effetto velour dalla mano morbida ma scattante.

L'articolo Venezia/C 620gr è sempre disponibile a magazzino  
in tutti i colori della cartella.

- PRODOTTO CON FIBRA RICICLATA
- RICICLABILE



**STANDARD  
100**  
1208054.O  
**CENTROCOT**

OEKO-TEX® Standard 100

Global control and certification system for all textile-based products, which guarantees absence of substances harmful to humans and the Environment, through rigorous checks carried out every year. This product is certified in class 1, as safe in contact with skin, even of newborn.

Oeko-Tex Standard 100 guarantees compliance to:

REACH (EC Regulation 1907/2006), SVHC, POP (EC Regulation 1021/2019), GB18401, CPSC

## ENG

Manifattura Maiano has always been sensitive to environmental issues.

With our technology we transform regenerated polyester, obtained from the recovery of plastic bottles (PET), into a needle-punched felt, recycled and recyclable, with velour effect. It has a soft but springy hand. Venezia/C 620gr is always available in stock in all the colors of the card.

- WITH RECYCLED FIBER
- RECYCLABLE

MADE IN ITALY



# VENEZIA/C

READY COLORS  
IN STOCK



11



898



452




897



900



952

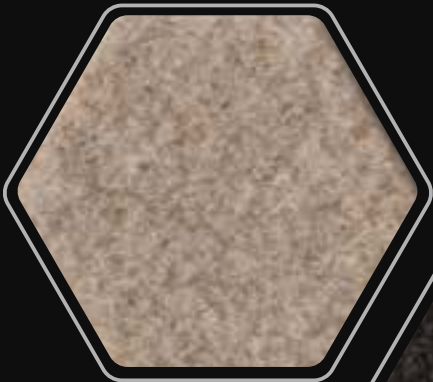

26



43



FREE OF HARMFUL  
CHEMICALS






892



124

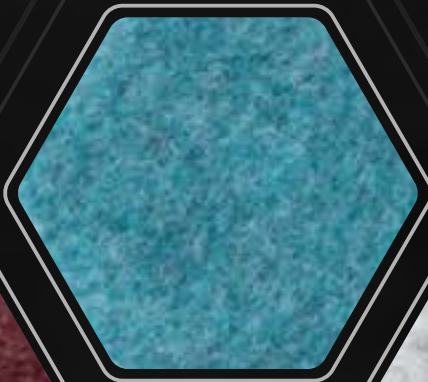

896



02



311



426



906



304



899




364



895



306

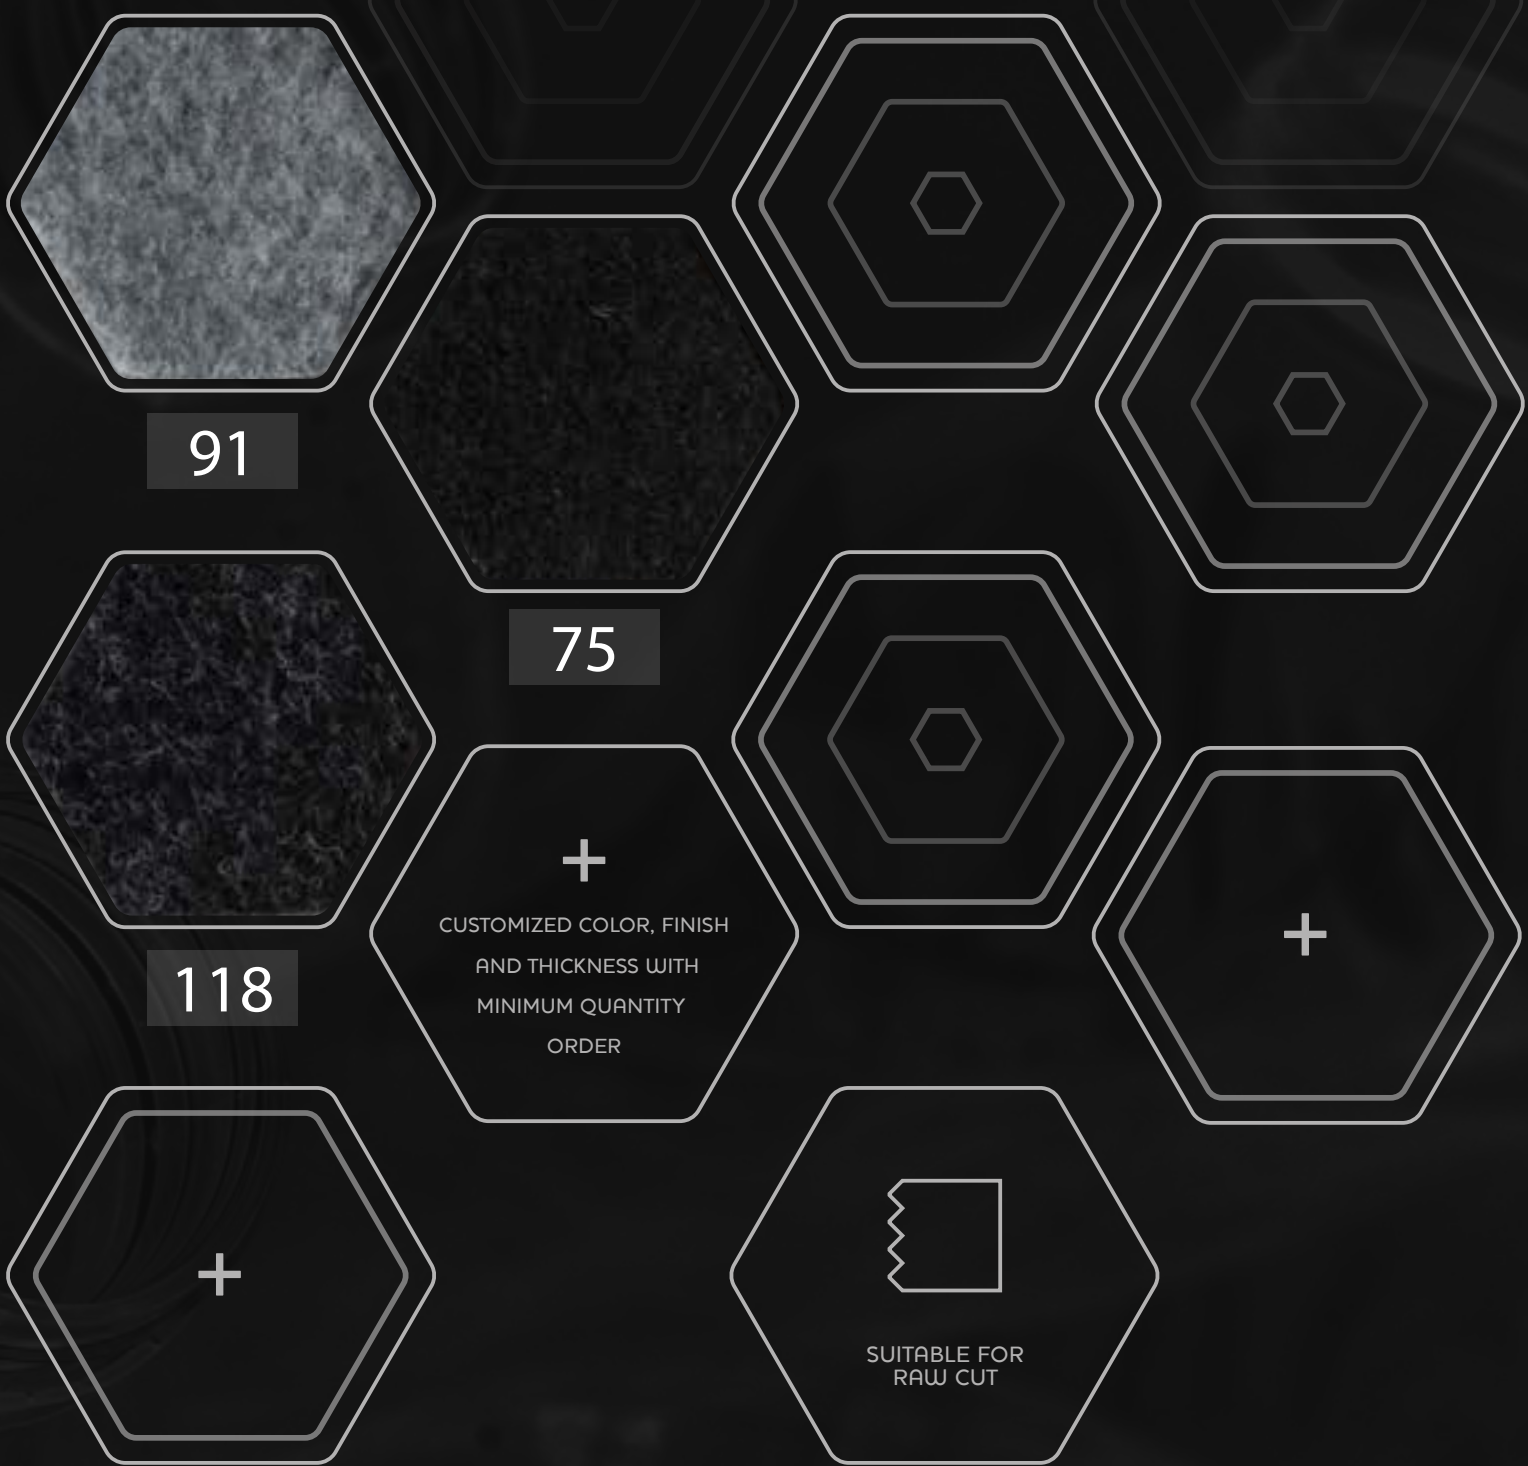

## TECHNICAL FEATURES

|                                       |                    |                                  |
|---------------------------------------|--------------------|----------------------------------|
| Tensile strength and elongation       | ISO 9073-3         | llongit.: 955 N, elong.: 72%     |
| Tensile strength and elongation       | ISO 9073-3         | trav.: 951N, elong.: 86%         |
| Dim. Stability to washing and drying  | ISO 5077, ISO 6330 | Shrinkage < 2%                   |
| Abrasion resistance for uppers/lining | EN 13520           | Abrasion at 25600 (dry): absent  |
| Abrasion resistance for uppers/lining | EN 13520           | Surface peel off (dry): slight   |
| Abrasion resistance for uppers/lining | EN 13520           | Fading (dry): moderate           |
| Abrasion resistance for uppers/lining | EN 13520           | Abrasion at 25600 (wet): absent  |
| Abrasion resistance for uppers/lining | EN 13520           | Surface peel off (wet): moderate |
| Abrasion resistance for uppers/lining | EN 13520           | Fading (wet): slight             |

Please note that color may differ slightly from how they appear on this color chart